



CITY OF FORT MITCHELL

INVITATION TO BID ON PURCHASE OF 25 SETS OF PERSONAL PROTECTIVE COATS & PANTS

Bid Specifications are posted on www.fortmitchell.com

Bids Due: August 14, 2020 at 10:30 a.m. (EST)

Location: 2355 Dixie Highway, Fort Mitchell, KY 41017

INVITATION TO BID

1. The City of Fort Mitchell, Kentucky, and (“City”) will accept sealed bids for the **Purchase of Twenty-five Sets of Personal Protective Coats and Pants.**
2. The complete bid package with specifications may be obtained at www.fortmitchell.com or picked up at the City Municipal Building, 2355 Dixie Highway, Fort Mitchell, Kentucky 41017 between 9:00 a.m. and 4:00 p.m. (local time), Monday through Friday.
3. Sealed bids must be received by the City Clerk, at the City’s offices located at 2355 Dixie Highway, Fort Mitchell, Kentucky, 41017 or by email at aguenther@fortmitchell.com **marked “2020 PPE Bid”** until **10:30 a.m. (local time) on August 14, 2020.**
4. The City reserves the right to reject any and all bids, the right to waive any informality or irregularity in any bids, and the right to negotiate with the bidder submitting the apparent lowest and best bid.
5. Preference for Kentucky resident bidders will be applied in accordance with Kentucky law.

INSTRUCTIONS TO BIDDERS

1. Each bid must be signed by the bidder with his usual signature. Bids by a Partnership must be signed with the partnership name by one of the members of the partnership, or by an authorized representative, followed by the signature and title of the person signing. Bids by Corporations must be signed with the name of the corporation, followed by the signature and designation of the president, secretary, or person legally authorized to bind the corporation.
2. Bids must be received prior to the specified time of closing as designated in the invitation. Late Bids received will be returned unopened to the bidder.
3. Envelopes should be sealed when submitted and properly noted with title of bid, date and time deadline.
4. Bids containing erasures or corrections thereon will be rejected unless said erasures or corrections are noted over the initials or signature of the bidder.
5. References in the *Technical Specifications* describing the material, supplies, or services required of a particular trade name, catalog or model number are made for descriptive purposes to guide the bidder in interpreting the type of material or supplies or nature of the work described. They should not be construed as excluding offers on other type of materials and supplies or of performing the work in a manner other than specified. However, the bidder’s attention is called to Paragraph 6 of the *General Conditions* which must be strictly adhered to.

6. Bids are to be mailed to or delivered to the Office of the City Clerk, City of Fort Mitchell, 2355 Dixie Highway, Fort Mitchell, Kentucky 41017 or emailed to the aguenther@fortmitchell.com.
7. The City's sales tax exemption status may not be used by the bidder to acquire materials or supplies on a sales tax exempt basis. Any sales taxes or other taxes incurred by the bidder remain the responsibility of the bidder. It is assumed that all such costs incurred by any bidder are included in his bid price.

GENERAL CONDITIONS

1. The City of Fort Mitchell reserves the right to reject any and all bids, and unless otherwise specified by the bidder, to accept any item or group of items in the bid. In case of error in extending the total amount of the bid, the unit price will govern.
2. The City of Fort Mitchell's payment terms are net 30.
3. In case of default by the bidder or contractor, the City of Fort Mitchell may procure the articles or services from other sources and hold the bidder or contractor responsible for any excess cost occasioned thereby.
4. Prices shall be stated in units of quantities specified.
5. Whenever a reference is made in the specifications or in describing the materials, supplies or services required; or a particular trade name; manufacturer's catalog; or model number, the bidder, if awarded a contract, will be required to furnish the particular item referred to in strict accordance with the specifications or description unless a departure or substitution is clearly noted and described in the proposal by the bidder.
6. The bidder, if awarded an order or contract; agrees to protect, defend, and save harmless the City against any demand for the use of any patented materials, process, article, or device, that may enter into the manufacture, construction, or form a part of the work covered by either order or contract and he further agrees to indemnify and save harmless the City from suits or actions of every nature and description brought against it, for or on account of any injuries or damages received or sustained by any party or parties, by or from any of the acts of the contractor, his servants, or agents.
7. Samples, when requested, must be furnished free of expense prior to the opening of bids and if not destroyed will, upon request, be returned at the bidder's expense.
8. Terms and conditions, unless stated otherwise herein, are to be effective for one year from the date of bid acceptance.
9. All bids shall remain valid for a period of thirty (30) days after bid opening unless a longer period is otherwise stated herein. Bidder is required to obtain a City of Fort Mitchell Occupational License within ten days of contract award, if the service is to be received within the City of Fort Mitchell.

(N/A for purchase of equipment).

10. All federal, state, and local law requirements must be followed.
11. Prior to a contract being awarded to the lowest and best responsible and responsive bidder whose bid meets specifications, a resident bidder of the Commonwealth shall be given a preference against a nonresident bidder registered in any state that gives or requires a preference to bidders from that state. The preference shall be equal to the preference given or required by the state of the nonresident bidder.
12. Bids will be evaluated and awarded on the basis of Lowest and Best Bid;
13. “Responsible bidder” means a person who has the capability in all respects to perform fully the contract requirements, and the integrity and reliability, which will assure good faith performance.
14. *Special Conditions*, if any, are enclosed. A conflict between *Special Conditions* and
15. *General Conditions* shall be construed in favor of the *Special Conditions*.
16. The Description of Requirements and Specifications (technical specifications) for the procurement are enclosed herewith.

SPECIAL CONDITIONS

The City of Fort Mitchell is soliciting sealed bids for the purchase of twenty-five sets of Personal Protective Coats and Pants. Sealed bids must be received by the City Clerk, at the City’s offices located at 2355 Dixie Highway, Fort Mitchell, Kentucky, 41017 or by email at aguenther@fortmitchell.com marked “2020 PPE Bid” by **10:30 a.m. (local time) on August 14, 2020.**

REFERENCES

Three (3) references shall be included with the bid. These references must be from facilities that are currently being serviced or have been serviced by the bidder and are office complexes of the approximate size of the one for which this contract is for. They are to include

- Facility, including the address
- Contact Person
- Contact Person’s telephone number

GENERAL PROVISIONS

The City also requires that the contractor abide by all applicable laws and regulations. Each bidder is urged to read the entire set of documents thoroughly and be prepared to comply with all provisions contained herein. The City of Fort Mitchell and its personnel will work with each potential Bidder individually or as a group, on any question(s) that may arise. Each Bidder shall contact Amy Guenther, City Clerk/Treasurer, at (859) 331-1212 with any questions,

INSURANCE REQUIREMENTS

Prior to commencement of your services, you must provide the city with a certificate of insurance evidencing the following insurance coverage:

1. Commercial General Liability insurance on ISO form CG00011001 (or a substitute providing equivalent coverage). The limit shall not be less than \$1,000,000 per occurrence. ***The City of Ft. Mitchell must be named as an Additional Insured; the certificate shall specify that the coverage afforded is primary and Non-contributory with respect to any other coverage available to the City of Ft. Mitchell.*** If you are providing construction services, you must use additional insured endorsements CG20100704 AND CG20370704.
2. Comprehensive owned and non-owned automobile liability insurance with a minimum combined single limit of \$1,000,000.
3. Workers Compensation Coverage specific to the State of Kentucky.

LEGAL RIGHT TO SPECIFY

The Fire Department (for the remainder of this section referred to as the "specifier") chooses to exercise its Legal Right to Specify as determined by the U.S. Supreme Court's affirmation of the decision handed down in the case of Whitten Corp. vs. Paddock, by the U.S. District Court of Massachusetts, the First Federal District Court, which in effect states:

- 1) That as trained professionals, specifiers make informed judgments on products that they feel best serve their needs. Also, that proprietary specifications (if chosen) DO NOT violate any antitrust laws. Technically, very few brands of material or equipment are exactly alike, and if the specifier wants to limit the specification to one source. He has the right to do so and enforce it.
- 2) Only the specifier has the responsibility and judgment for determining whether a proposed substitution is an "or equal".
- 3) That from start to finish in the purchasing process, only the specifier can ultimately decide if another desirable product is available in lieu of the specification.
- 4) Finally, that the courts concluded "the burden is on the supplier or manufacturer. Who has NOT been specified, to convince the specifier that their product is equal for the purpose of a particular project".

The specifier has determined that this product specification shall represent the product to which all offerings shall be compared. Due to the fact that firefighting is an ULTRAHAZARDOUS, UNAVOIDABLY DANGEROUS activity, only trained Fire Department personnel with specific knowledge in the area of Personal Protective Equipment shall be allowed to make the final determining decision on the selection of the appropriate product to serve the Fire Department's needs.

TECHNICAL SPECIFICATION FOR PROTECTIVE STRUCTURAL FIREFIGHTING COAT

1.0 PURPOSE AND SCOPE

This specification defines the minimum requirements for structural firefighter personal protective equipment (PPE) providing limited protection as defined by NFPA 1971, *Standard on Protective Ensemble for Structural Fire Fighting*, Latest Edition. In the absence of comment on a particular point, industry standard practice shall be presumed to prevail. Every exception to specifications must be clearly spelled out at the time of bid.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

2.0 UNITS OF MEASURE

Current NFPA standards applicable to this product specification express values for measurement requirements in SI (metric-based) units, followed by US (inch-pound) approximate equivalents in parentheses. For the convenience of the fire department, this product specification *reverses the order* and presents the more familiar US approximation first, followed by the SI requirement in parentheses.

3.0 CERTIFICATION

The manufacturer must certify that the garments proposed in its bid meet or exceed all requirements of NFPA 1971. The manufacturer must also list and label this product with Underwriters Laboratories Inc. (UL) or Safety Equipment Institute (SEI), as the third party certification organization prescribed in NFPA 1971. All certification testing and test preconditioning must have been performed by an ISO 17025-certified laboratory. UL, SEI or a UL Authorized Client Test Data Program laboratory will fulfill this requirement.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

The manufacturer shall be registered to ISO 9001, *Quality Management Systems - Requirements*, 2000.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

4.0 WARRANTY

The manufacturer must provide a lifetime warranty against defects in materials and workmanship with the bid package.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

5.0 PRODUCT COUNTRY OF ORIGIN

For liability reasons, garments must be manufactured in the United States of America or Canada by companies with their assets and incorporation within the United States of America or Canada.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

6.0 LABELING REQUIREMENTS

Labels shall be permanently and integrally printed onto materials that meet all the requirements for labels of NFPA 1971. The garment shall be clearly labeled to fully identify the material content of all three layers: outer shell, moisture barrier and thermal liner.

In addition, each separable outer shell component shall be labeled in an obvious location including the size, date of manufacturer and an individualized serial number and bar code that matches the corresponding garment liner.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

7.0 CARE INSTRUCTIONS

The manufacturer shall provide a user information guide for the garments, which complies with user information requirements of NFPA 1971. Topics shall include, but not necessarily be limited to: pre-use information, preparation for use, inspection frequency and details, don/doff, use consistent with NFPA 1500, maintenance and cleaning, and retirement and disposal criteria and considerations.

This document shall be packaged with each garment along with a specification summary sheet describing garment custom options, sizing and production details. This written information shall be in complete compliance with NFPA 1971 requirements, and shall reference same.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

8.0 TRACEABILITY PROGRAM

The manufacturer shall have in place a computer maintained traceability program that provides for the assignment of a production control number to each garment. The traceability program must be capable of tracing the garment through production, from the bolts of cloth used in all three layers of the garment composite construction, to the assignment of the garment to the individual firefighter. This production control number shall be visibly located on the garment label and on other protected areas of garment.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

9.0 PATENT CONSIDERATIONS

The Bidder, without exception, shall indemnify and save harmless the Purchaser and its employees from liability of any nature and kind, including cost and expenses for or on account of any copyrighted, patented or un-patented invention, process, or article manufactured or used in the performance of the contract, including its use by the Purchaser. If the Bidder uses any design, device, or materials covered by letters, patent or copyright, it is mutually agreed and understood without exception that the bid prices shall include all royalties or costs arising from the use of such design, device, or materials in any way involved in the work.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

10.0 SIZING

To ensure a perfect fit, sizing shall be determined by actual measurements taken of the firefighter by a trained measurement specialist, or sizing try-ons, or both. Sizing measurements shall be taken according to a schedule and location(s) mutually agreed between the manufacturer and the department.

Garments shall be available in custom sizing as follows: coat chest in 2-inch (5.1 cm) increments, coat sleeve in 0.5-inch (1.3 cm) increments, coat back length in 1-inch (2.5 cm) increments, pant waist in 2-inch (5.1 cm) increments and pant inseam in 1-inch (2.5 cm) increments. A full range of women's sizing, on women's patterns, must also be available. Each sleeve and inseam length shall provide 100% gradation from shoulder to wrist, and from hip to ankle, to provide proper fit for individual arm and leg lengths. Pattern tailoring to custom-fit neck, bicep, hip/seat and thigh circumferences must also be provided, when needed, at no additional charge. Neither Small-Medium-Large-Extra Large sizing nor women's garments cut to men's patterning are considered acceptable, since proper fit facilitates mobility and minimizes stress.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

11.0 SELF-BINDING

Liner and moisture barrier shall be stitched together and turned, then topstitched, to create a self-binding edge. The extra bulk of separate binding material is specifically prohibited.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

12.0 THREAD


All thread used in structural seams shall be Nomex® of minimum Tex size T-70. Light colored garments and trim areas shall feature yellow thread. Black and dark garments shall feature black thread. Tan or bronze colored garments shall feature tan thread.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

13.0 STITCH METHODS


13.1 MAJOR A & B SEAMS

Except for the collar Major A seam, which is single-needle lock stitched three times, all Major A & B seams (as defined by NFPA 1971) shall be double stitched, double feld throughout all three layers (outer shell, moisture barrier and thermal liner), and shall be made with Nomex® thread, minimum Tex size T-90. Detailed stitch and seam type requirements are shown below.

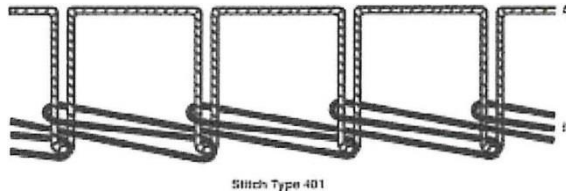

Stitch Type 401

Double lockstitch, as defined by ASTM D 6193-97



Modified Seam Type LSc-2

Double feld seam, modified only to ensure that both stitch lines penetrate al/ layers of cloth at joining, otherwise as defined by ASTM D 6193-97

Also, all moisture barrier seams shall be tape-sealed to meet all requirements of the NFPA 1971 Liquid Penetration Resistance Test.

Does Your Bid Comply With All Aspects of this section?


For Outer Shell: Yes__No__

For Thermal Lining: Yes__No__

For Moisture Barrier: Yes__No__

13.2 MINOR SEAMS

Most Minor seams, such as storm shields and mated hems, shall also be stitched with the specified Nomex thread. Detailed stitch and seam type requirements are shown below.



Seam Type SSae-2

Stitch Type 301

*Lockstitch as defined by ASTM D
6193-97*

Seam Type SSae-2

*As defined by ASTM D 6193-97, shown
(a) before and (b) after required turning*

Does Your Bid Comply With All Aspects of This Section? Yes__ No__

POCKETS

Flat_garment pockets shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.

Stitch Type 301
Lockstitch as defined by ASTM D 6193-97

Seam Type LSd-2
As defined by ASTM D 6193-97

3-Dimensional pocketing shall feature these same construction details, but the reinforced single stitch Seam Type LSd-1 may be substituted for LSd-2. Detailed seam type requirements are shown below.

Stitch Type 301
Stitch Type 301
Lockstitch as defined by ASTM D 6193-97


Seam Type LSd-1
As defined by ASTM D 6193-97

Does Your Bid Comply With All Aspects of This Section? Yes_____ No _____

133 TRIM AND DANGER LABELS

Trim and DANGER labels shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.

Stitch Type 301
Lockstitch as defined by ASTM D 6193-97



Does Your Bid Comply With All Aspects of This Section? Yes_____ No _____

13.5 SINGLE LAYER HEMMING AND FINISHING

Single layer hemming and finishing shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.

<i>Stitch Type 301</i>	<i>Seam Type EFb-1</i>
<i>Lockstitch as defined by ASTM D 6193-97</i>	<i>As defined by ASTM D 6193-97</i>

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

14.0 POCKETS

When exterior pockets are specified, the following requirements shall apply to all such custom option specified exterior pockets:

All pockets and flaps shall be reinforced at the top corners with bar tack stitching.

All pockets shall be reinforced with an extra layer of NFPA-certified outer shell, moisture barrier, or other NFPA-certified reinforcement material for extra durability. The exact location of the reinforcements shall be identified in the custom options section(s).

All pockets shall have a means to drain water and shall have a means of closure.

All pocket closures shall be made either with hook and loop fastener tape a minimum of 1.5 inches (3.8 cm) wide, with a flap, or with snaps. The specific placement of the closure system shall be outlined in the custom options sections.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

15.0 TAILORED GRADING OF GARMENT LININGS

All garment layers and Cold Weather Accessory Linings shall be graduated in size to fit within in each other in the overall composite without causing bunching or binding when the garment is worn.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

16.0 POINTS OF STRESS

All points of stress shall be reinforced with sturdy bar tacks. Rivets are not acceptable because of their potential for rust and electrical or heat conduction.

Does Your Bid Comply With All Aspects of This Section? Yes___ No ___

17.0 ASSET TRACKING SERVICES

Upon request, the manufacturer shall be capable of providing a web based software to track care, cleaning and maintenance of PPE. The tracking software will include Inventory Assist and the Hot Spot Locator to help you analyze gaps in your inventory and pinpoint recurring repair problems. Records will be secured in a cloud based environment with 24/7 access.

This tracking program shall meet or exceed all record-keeping requirements of NFPA 1851, *Standard on Selection, Care and Maintenance of Structural Fire Fighting Protective Ensembles*, Latest Edition. Manufacturer shall have the ability to import records for gear purchased from them, upon request, providing all details required to meet NFPA 1851, and assist with training to assign all gear while importing.

Labels on each separable part of the garment shall include a standard style interleaved 2 of 5 barcode containing (at a minimum) an individualized serial number for asset tracking purposes.

The manufacturer shall be capable of providing training to department personnel who are involved in the daily use of this tracking program, as well as a built in interactive tutorial.

Does Your Bid Comply With All Aspects of This Section? Yes___ No ___

18.0 REPAIRS AND ALTERATION SUPPORT

The manufacturer shall furnish, free of charge, reasonable quantities of NFPA 1971-certified thread, materials and other supplies to allow the department to manage its own ongoing internal maintenance efforts. Also, the manufacturer shall provide on call at no charge, during normal business hours, a liaison for the repair department to assist the Fire Department on a telephone consultation basis, on all maintenance or repair questions that might arise. Additionally, the manufacturer shall agree to expedite, on its own cost-only basis, all repairs that must be performed at the manufacturer's plant, rather than in department, over the life of the contract.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ___

19.1 HIGH TEMPERATURES THERMAL INSULATING MATERIALS REQUIREMENT

Because thermally stable materials are essential to maximizing protective performance in firefighters' PPE, and because NFPA only states "minimum" performance requirements, all thermal liner or thermal enhancing materials used in the garments shall also meet the following criteria after the 500 degree F oven test:

- 1) Material shall remain intact and flexible
- 2) No portion of the material shall crack, crumble or flake

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

20.0 BREATHABILITY REQUIREMENT

Excluding where required by NFPA standard, necessary for functionality, or specifically called out in the custom option sections, all materials fabrics and reinforcements used in the construction of the garments shall be breathable and all moisture barrier material must be as specified in the Materials Section.

The breathability requirement includes but is not limited to: collar, chinstrap, storm shield, fly, water wells, front coat facings, and reinforcement cushioning where applicable.

Areas where non-breathability is allowed (absent Custom Option specifications): trim or other items placed externally on the arms that might need extra material to pass NFPA required Stored Energy Testing, hook and loop fastening, hardware or hardware backing, and pocket linings where used exterior to the outer shell. Does Your Bid Comply With All Aspects of This Section? Yes__ No__

21.0 CONDUCTIVE AND COMPRESSIVE HEAT RESISTANCE (CCHR)

Using breathable materials as outlined in the section titled Breathable Materials, there shall be: A minimum area of 4" x 4" (10.2 cm x 10.2 cm) at the shoulders and elbows that provide a minimum of 25 CCHR at 2 psi. With a minimum 6" x 6" (15.2 cm x 15.2 cm) area at the knees that provide 25 CCHR at 8 psi.

In all three of these compression areas at least a portion of the protective area shall be made from high temperature fiber based materials sewn to the thermal liner on the inside of the liner toward the moisture barrier.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ____

22.0 SEAM PROTECTION AT CUFFS

At the coat and pant cuff Major A seams, the reflective trim shall stop just before the folding of the full field seam and for additional abrasion protection be covered by a sewn on strip of polymer coated Kevlar material laid on top of the Major A seam and covering each end of the trim.

Does Your Bid Comply With All Aspects of This Section? Yes__ No__

23.0 APPLICABLE DOCUMENTS

The following standards in their active versions on the date of invitation for bid shall form a part of this specification to the extent specified herein.

<u>STANDARD</u>	<u>TITLE</u>
ASTM D 6193-97	Standard Practice for Stitches and Seams
NFPA 1500	Latest Edition Standard on Fire Department Occupational Safety and Health Program
NFPA 1851	Latest Edition Standard on Selection, Care, and Maintenance of Structural Fire Fighting Protective Ensembles
NFPA 1971	Latest Edition Standard on Protective Ensemble for Structural Fire Fighting

Does Your Bid Comply With All Aspects Of This Section? Yes__ No__

To avoid liability and interface problems, coats and pants shall be procured from the same manufacturer.

24.0 DESIGN CONCEPT (STYLING)

The standard coat design shall be 6-inches (15.2 cm) longer at the rear hem than at the front hem and provide continuous and unbroken moisture barrier and thermal liner protection from the collar seam to the hem at the bottom of the coat tail. Each coat length shall be determined by each individual's torso length to provide the coat-to-pant interface as defined by NFPA 1500. Coat design must interface properly with standard waist high bunker pants. To facilitate various body types the front to rear length differential shall be made available in 3-inch (7.5cm), 4-inch (10.0cm), and 5-inch (12.5cm and 6-inch (15.0cm) Tail Drops

Does Your Bid Comply With All Aspects of This Section? Yes__ No__

25.0 PATTERNING CONCEPT

Garments shall feature a tailored three-piece body (with one-piece back) and one-piece, set-in sleeve construction throughout the outer shell, moisture barrier and thermal liner layers. One-piece garment body (either all layers or some layers) will not be considered acceptable since they cannot be tailored to hard-to-fit personnel. Similarly, garments with seams in mid-back are not considered acceptable because of backbone irritation that can occur with SCBA use. To facilitate individual tailoring needs, the major A & B seams joining the one-piece back to the right and the left front body panels (outer shell and all interior layers) shall be located at the most lateral position when the coat is laid flat for inspection.

Does Your Bid Comply With All Aspects of This Section? Yes__ No _____

26.1 PATTERNING REQUIREMENTS

To assure maximum freedom of movement and reduce kinetic resistance with minimum garment weight and bulk, coat patterning shall include the following features:

- Degree of slope on shoulders shall be no more than 20%.
- Hydraulic Butterfly sleeve patterning having built-in underarm bellow with 85-degree Lift up Release Action shall be provided to minimize coat hem rise.
- Sleeve attachment shall minimize shoulder lift and allow a full 360 degrees freedom of movement.
- Coat hem rise with overhead reach of both arms not to exceed 4-inch (10.2-cm) maximal extension on properly fitted garments.
- Shell-and-liner retraction at the cuff shall not exceed 1 inch (2.5 cm) when both arms are raised overhead. This helps eliminate wrist exposure.
- 10-inch (25.4-cm) chest over-sizing shall be provided.
- Coat sweep measurements must be consistent with the chest over-size at the hem.
- Reach when measured from cuff to cuff, with coat lying flat, and standard length sleeves extended to each side, shall be provided as detailed below.
- An alteration point at the hem that during manufacture allows the sweep dimension to be adjustable in two-inch (5.0cm) increments

<u>Chest Size</u>	<u>Standard Reach</u>
40 in(101.6cm)	66 in (167.6 cm)
42 in(106.7cm)	67 in (170.2 cm)
44 in(111.8cm)	68 in (172.7 cm)
46 in(116.8cm)	68 in (172.7 cm)

Does Your Bid Comply With All Aspects of This Section? Yes___ No___

27.0 DRAG RESCUE DEVICE CORD

Manufacturer shall supply an NFPA required and certified Drag Rescue Device with each coat. Each strap will be properly labeled with the chest size(s) the Rescue Strap is designed to fit.

Rescue Strap shall be designed in a fashion that it functionally provides a dynamic and articulated action and to eliminate excess strapping material hanging down the back when installed between the garment's liner and outer shell.

The device shall be constructed using two components: a 1.75" (4.45 cm) Kevlar webbing grab handle; and a free-floating loop of Kevlar rope to go around each of the wearer's arms/shoulder.

The grab loop shall extend upward and pass through a tunnel of outer shell and pass out through a reinforced slot in the coat outer shell just below the center rear of the collar seam. . The protruding grab loop shall then fold back down and be stored by hook and loop fastener.

The end of the garb loop shall be covered with an outer shell flap sewn below the held in place with hook & loop fastener to reduce the chances of snagging the grab loop by accident.

The Grab Handle shall be constructed of soft and pliable Kevlar webbing meeting the following specifications:

Description	100% Kevlar Double Plain
Width	Weave 1.75" (4.45 dm)
Thickness	0.064" ± 0.010" (.163 cm ± .0254 cm)
Tensile	5,000 lb. minimum (22.24 kN)

To facilitate comfort and safety the free-floating loop shall be constructed of soft and pliable Kevlar rope meeting the following specifications:

Description 100% Kevlar Tubular Plain Weave -
Natural Width .038" (.097 cm)
Thickness 0.144" ± 0.005" (.366 cm ± .013 cm)
Tensile 3500 lb. minimum

(15.57kN) Rescue Strap shall be sewn with Kevlar thread

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

28.0 LINER ATTACHMENT

The completed liner-moisture barrier assembly shall attach by means of five (5) evenly spaced glove snaps to each outer shell front facing to reduce weight, bulk and stiffness. To provide continuous moisture and pathogen protection at the front, the liner shall be positioned so it is sandwiched between the coat front facing and a breathable pathogen shield. The use of zippers or hook and loop fasteners in this area is not allowed due to their added weight, bulk and stiffness.

Liner sleeves shall be attached at the cuff by means of snaps on two (2) sets of Nomex tabbing per liner cuff. The male and female snap parts shall both be located on Nomex tabbing that is sewn to the liner at the cuff. A separate piece of Nomex tabbing shall be sewn to the shell cuff and fashioned as a loop without any snap hardware.

To provide continuous moisture protection and pathogen protection at the neck, the liner shall be positioned so that it is sandwiched between an outer-facing pathogen shield and an inside facing of the specified outer shell material.

Attachment at the neck shall be by means of four (4) glove snaps that penetrate only the layer of the attachment strip facing towards the liner, so that metal contact at a wearer's neckline is completely eliminated.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ___

29.0 COAT CERTIFICATION LABEL ON LINER

The coat certification label on the liner shall be affixed to the inside right body panel of the liner in a fashion to provide an inside liner pocket.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ___

30.0 COAT CERTIFICATION LABEL ON SHELL

The coat label on the shell shall be affixed in a conspicuous location once the line removed.

Does Your Bid Comply With All Aspects of This Section? Yes___ No___

31.0 COLLAR

The collar shall be of layered construction, consisting of a layer of waterproof moisture barrier and a layer of NFPA 1971-certified insulating material, sandwiched between two (2) layers of specified outer shell material. NFPA compliant collars shall be at least 3 inches (7.6 cm) high while CGSB compliant collars shall be at least 4 inches (10.2 cm) high. The design shall incorporate in its patterning a natural contour that will allow proper fit and performance in the standing (upright) or stowed position.

There shall be no vertical or horizontal seams or stitching in the body of the collar. The left outside of the collar shall have a sewn piece of 2-inch x 2-inch (5.0-cm x 5.0-cm) hook fastener tape for chinstrap-to-collar closure. The fastener tape shall be located rearward far enough to allow for the location of a forward mounted microphone tab if so desired. Each collar shall be graded to individual coat sizes.

Does Your Bid Comply With All Aspects of This Section? Yes__ No___

32.0 CHIN STRAP

The chinstrap shall be of layered construction identical to that of the collar configuration described in the previous paragraphs. Chinstrap shall be of a crescent shaped design with *minimum dimensions of* 9 inches (22.5 cm) long across the top corners, 10.5 inches (26 cm) long across the bottom corners, and 3.5 inches (8.75 cm) in vertical height, measured at the center. The leading underside edge of the chinstrap shall have a 4.0-inch-wide (3.8 cm-wide) horizontal strip of loop fastener tape to ensure an adequately adjustable closure and to ensure passage of the Whole Garment Liquid Penetration Test.

Does Your Bid Comply With All Aspects of This Section? Yes__ No ___

33.0 HANG-UP LOOP

An 80-pound (36.3 kg) tear strength hang-up loop shall be provided at the interior collar seam. The loop shall be constructed of triple layers of the specified outer shell material, lock stitched to the coat. Webbing is not acceptable.

Does Your Bid Comply With All Aspects of This Section? Yes_____ No _____

34.0 SLEEVES

To prevent stove-piping the sleeves shall be individually graded by coat size and sleeve length. For maximum freedom, the sleeve design shall feature extra full cut one-piece set-in sleeves with built-in bellows. To reduce the chances of possible top seam failure in that high thermal exposure area, the sleeve Major seams shall follow the underside of the arm and shall not cross over the outside of the elbow joint. Sleeve seam and sleeve attachment to coat body in all layers shall be 100% double fold and double stitched for maximum.

Does Your Bid Comply With All Aspects of This Section? Yes___No___

35.0 INNER WRISTLET & WATERWELL

Every coat shall feature a minimum 4.5-inch (11.4-cm) long, double-layer knit inner wristlets protected by a flame-resistant and moisture-resistant inner water well. The inner wristlet shall be sewn to the thermal liner sleeve end (not to the outer shell). The specified moisture barrier shall form an inner water well with an elastic gather sewn to the moisture barrier sleeve end.

Does Your Bid Comply With All Aspects of This Section? Yes___ No___

36.0 EXTERNAL WRISTLET

Every coat shall feature a 2.5-inch (6.4 cm) long knit outer wristlet, which shall be mounted to the end of each outer shell sleeve to prevent liquid and debris movement up the sleeve between the outer shell and the moisture barrier/ thermal liner assembly.

Does Your Bid Comply With All Aspects of This Section? Yes_____ No _____

37.0 FRONT CLOSURE PROTECTIVE OVERLAP

Two-inch-wide (5.1 cm-wide) panels of breathable moisture/ pathogen barrier and specified thermal liner materials shall be provided at coat front closure facings to preclude any type of break in the protective envelope. The entire circumference of a closed coat shall consist of specified shell, moisture barrier and thermal liner materials.

An additional layer of breathable moisture/ pathogen barrier material shall be sewn between the 2-inch-wide (5.1 cm-wide) panels and outer shell coat body for the entire length of coat front in a fashion to prevent liquid entry during the NFPA 1971 Whole Garment Liquid Penetration Test.

Does Your Bid Comply With All Aspects of This Section? Yes_____No _____

38.1 COMPOSITE MATERIALS

The specifier has determined the ONLY acceptable combination of materials. Any

substitution of materials shall be grounds for immediate disqualification of bid without further consideration.

38.2 OUTER SHELL- 7.5 OS GEMINI XT BRONZE

38.3 THERMAL LINING- 7.1 OS SYNERGY 2 LAYER

38.4 MOISTURE BARRIER- 5.5 OS STEDAIR 4000

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

For Outer Shell: Yes _____ No _____

For Thermal lining: Yes _____ No _____

For Moisture Barrier: Yes _____ No _____

39.0 COAT CUSTOM OPTIONS TO BE PROVIDED

Instructions in this custom options section that contradict Earlier specifications or statements supersede those earlier specifications or statements as long as the required certifications are not compromised.

COAT AND PANT LTO

Refresh **REENGINEERED**
REV1 ***REVISION 1***

LTOTOS4IZ	LTO Tail Order Shell -7.5 osy Gemiri XT – Bronze
LTOTTLI	LTO Tail Thermal Liner -7.1 osy Synergy II 2 Layer
LTOTMBG	LTO Tail Moisture Barrier -5.5 osy Stedair 4000
IPLC	(020) Std-Inspection Port Liner
LNDC	Std-Liner detachable
LNSETTE	Std-SET Thermal Enhancement
PKTLSTD	Std-Liner Label Pocket
RS-RRSAC	(R01) Std-Articulating Rapid Rescue Strap
TR DSS	Std Trim Double Stitched
TRC 302M-TL	Trim-(2) NFPA Hi-viz-lime 2 tone Scotchlite(3’)
LTAHT-41Z	Above Hem Trim Patch – Gemini – Bronze
LT3S01-SL	3” sewn letter-lime Scotchlite <FMFD> *no periods*spaces
LTEMVO	Velcro Only for Hero Patch
CLZV-41Z	(E10) 2” Velcro Zipper Coat Closure
CCLTO-41Z	(Q02) LTO Comfort Chinstrap
CCLTO-NF	No fold Chinstrap
LNDAPC	(050) Dead Air Panels
LNTL-EMLIQ	(544) Easy Move Liner Combo – TL 1 &-TLQ
CFCC-ARB	Coat Cuffs – Arashield-Black
CFSLICS-41Z	Shingle Cuffs-Sewn-Gemini XT-Bronze
SATU-NONE	Delete Standard Take Up Straps
PKDRPT-41Z	D-Ring on a Patch –Gemini XT – Bronze --left side -Place directly above hem trim & directly behind half hi bellow
PKDRPT-41Z	D-Ring on a Patch –Gemini XT – Bronze --right side -Place directly above hem trim & directly behind half hi bellow
PKFCNS-41Z	Flashlight Clip/No strap – Gemini XT – Bronze --right chest -Place directly above radio pocket
PKFCNS-41Z	Flashlight Clip/No strap – Gemini XT – Bronze --left chest as close to shield as possible -Full Velcro on strap
PKHBLN-41Z	Half Hi Bellows Pockets – Gemini XT – Bronze --7 x9 x 1.5
PKBLCHW-FLC	Hand warmers behind Bellows Pockets- Fleece
PKBLC-V2	4 Vertical Strips Velcro on Flap/Full Velcro on pocket
PKMT-41Z	Mic Tab – Gemini XT – Bronze --on shield (stormflap) -- 0.5 x 2.5 -Place 4” below top of shield

PKRD-41Z

Radio Pocket – Gemini XT – Bronze

--right chest

-- 8 x 3 x 2

PKRD-VF

Full Velcro on Pocket & Flap

WWSTHN

(W51) Sub Wristlets – Long with turned thumbhole -Nomex

Does Your Bid Comply With All Aspects of This Section? Yes ___No___

LEGAL RIGHT TO SPECIFY

The Fire Department (for the remainder of this section referred to as the "specifier") chooses to exercise its Legal Right to Specify as determined by the U.S. Supreme Court's affirmation of the decision handed down in the case of Whitten Corp. vs. Paddock, by the U.S. District Court of Massachusetts, the First Federal District Court, which in effect states:

- 1) That as trained professionals, specifiers make informed judgments on products that they feel best serve their needs. Also, that proprietary specifications (if chosen) DO NOT violate any antitrust laws. Technically, very few brands of material or equipment are exactly alike, and if the specifier wants to limit the specification to one source, he has the right to do so and enforce it.
- 2) Only the specifier has the responsibility and judgment for determining whether a proposed substitution is an "or equal".
- 3) That from start to finish in the purchasing process, only the specifier can ultimately decide if another desirable product is available in lieu of the specification.
- 4) Finally, that the courts concluded "the burden is on the supplier or manufacturer. who has NOT been specified. To convince the specifier that their product is equal for the purpose of a particular project".

The specifier has determined that this product specification shall represent the product to which all offerings shall be compared. Due to the fact that firefighting is an ULTRAHAZARDOUS, UNAVOIDABLY DANGEROUS activity, only trained Fire Department personnel with specific knowledge in the area of Personal Protective Equipment shall be allowed to make the final determining decision on the selection of the appropriate product to serve the Fire Department's needs.

PROTECTIVE CLOTHING FOR STRUCTURAL FIREFIGHTING PROFIT PANT

1.0 PURPOSE AND SCOPE

This specification defines the minimum requirements for structural firefighter personal protective equipment (PPE) providing limited protection as defined by NFPA 1971, *Standard on Protective Ensemble for Structural Fire Fighting*, Latest Edition. In the absence of comment on a particular point, industry standard practice shall be presumed to prevail. Every exception to specifications must be clearly spelled out at the time of bid.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

2.0 UNITS OF MEASURE

Current NFPA standards applicable to this product specification express values for Measurement requirements in SI (metric-based) units, followed by US (inch-pound) approximate equivalents in parentheses. For the convenience of the fire department, this product specification *reverses the order* and presents the more familiar US approximation first, followed by the SI requirement in parentheses.

3.0 CERTIFICATION

The manufacturer must certify that the garments proposed in its bid meet or exceed all requirements of NFPA 1971. The manufacturer must also list and label this product with Underwriters Laboratories Inc. (UL) or Safety Equipment Institute (SEI), as the third party certification organization prescribed in NFPA 1971. All certification testing and test preconditioning must have been performed by an ISO 17025-certified laboratory. UL, SEI or a UL Authorized Client Test Data Program laboratory will fulfill this requirement.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

The manufacturer shall be registered to ISO 9001, *Quality Management Systems - Requirements*, 2000.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

4.0 WARRANTY

The manufacturer must provide a lifetime warranty against defects in materials and workmanship with the bid package.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

5.0 PRODUCT COUNTRY OF ORIGIN

For liability reasons, garments must be manufactured in the United States of America or Canada by companies with their assets and incorporation within the United States of America or Canada.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

6.0 LABELING REQUIREMENTS

Labels shall be permanently and integrally printed onto materials that meet all the requirements for labels of NFPA 1971. The garment shall be clearly labeled to fully identify the material content of all three layers: outer shell, moisture barrier and thermal liner.

In addition, each separable outer shell component shall be labeled in an obvious location including the size, date of manufacturer and an individualized serial number and bar code that matches the corresponding garment liner.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

7.0 CARE INSTRUCTIONS

The manufacturer shall provide a user information guide for the garments, which complies with user information requirements of NFPA 1971. Topics shall include, but not necessarily be limited to: pre-use information, preparation for use, inspection frequency and details, don/doff, use consistent with NFPA 1500, maintenance and cleaning, and retirement and disposal criteria and considerations.

This document shall be packaged with each garment along with a specification summary sheet describing garment custom options, sizing and production details. This written information shall be in complete compliance with NFPA 1971 requirements, and shall reference same.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

8.0 TRACEABILITY PROGRAM

The manufacturer shall have in place a computer maintained traceability program that provides for the assignment of a production control number to each garment. The traceability program must be capable of tracing the garment through production, from the bolts of cloth used in all three layers of the garment composite construction, to the assignment of the garment to the individual firefighter. This production control number shall be visibly located on the garment label and on other protected areas of garment.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

9.0 **PATENT CONSIDERATIONS**

The Bidder, without exception, shall indemnify and save harmless the Purchaser and its employees from liability of any nature and kind, including cost and expenses for or on account of any copyrighted, patented or un-patented invention, process, or article manufactured or used in the performance of the contract, including its use by the Purchaser. If the Bidder uses any design, device, or materials covered by letters, patent or copyright, it is mutually agreed and understood without exception that the bid prices shall include all royalties or costs arising from the use of such design, device, or materials in any way involved in the work.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

10.0 **SIZING**

To ensure a perfect fit, sizing shall be determined by actual measurements taken of the firefighter by a trained measurement specialist, or sizing try-ons, or both. Sizing measurements shall be taken according to a schedule and location(s) mutually agreed between the manufacturer and the department.

Garments shall be available in custom sizing as follows: coat chest in 2-inch (5.1 cm) increments, coat sleeve in 0.5-inch (1.3 cm) increments, coat back length in 1-inch (2.5 cm) increments, pant waist in 2-inch (5.1 cm) increments and pant inseam in 1-inch (2.5 cm) increments. A full range of women's sizing, on women's patterns, must also be available. Each sleeve and inseam length shall provide 100% gradation from shoulder to wrist, and from hip to ankle, to provide proper fit for individual arm and leg lengths. Pattern tailoring to custom-fit neck, bicep, hip/seat and thigh circumferences must also be provided, when needed, at no additional charge. Neither Small-Medium-Large-Extra Large sizing nor women's garments cut to men's patterning are considered acceptable, since proper fit facilitates mobility and minimizes stress.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

11.0 **SELF-BINDING**

Liner and moisture barrier shall be stitched together and turned, then topstitched, to create a self-binding edge. The extra bulk of separate binding material is specifically prohibited.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

12.0 **THREAD**


All thread used in structural seams shall be Nomex® of minimum Tex size T-70. Light colored garments and trim areas shall feature yellow thread. Black and dark garments shall feature black thread. Tan or bronze colored garments shall feature tan thread.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

13.0 STITCH METHODS

13.1 MAJOR A & B SEAMS


Except for the collar Major A seam, which is single-needle lock stitched three times, all Major A & B seams (as defined by NFPA 1971) shall be double stitched, double feld throughout all three layers (outer shell, moisture barrier and thermal liner), and shall be made with Nomex® thread, minimum Tex size T-90. Detailed stitch and seam type requirements are shown below.

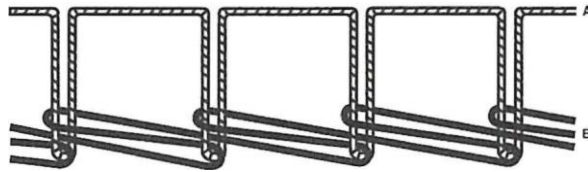

Stitch Type 401

Stitch Type 401

*Double lockstitch, as defined
by ASTM D 6193-97*



Seam Type LSc-2 (Modified)

Modified Seam Type LSc-2

*Double Feld seam, modified only to
ensure that both stitch lines penetrate all
layers of cloth at joining, otherwise as
defined by ASTM D 6193-97*

Also, all moisture barrier seams shall be tape-sealed to meet all requirements of the NFPA 1971 Liquid Penetration Resistance Test.

Does Your Bid Comply With All Aspects of This Section?

For Outer Shell: Yes__No__

For Thermal Lining: Yes__No__

For Moisture Barrier: Yes__No__

13.2 MINOR SEAMS

Most Minor seams, such as storm shields and mated hems, shall also be stitched with the specified Nomex thread. Detailed stitch and seam type requirements are shown below.

Stitch Type 301

Lockstitch as defined by ASTM D 6193-


Seam Type SSae-2

*As defined by ASTM D 6193-97, shown
(a) before and (b) after required turning*

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____


133 POCKETS

Flat garment pockets shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.

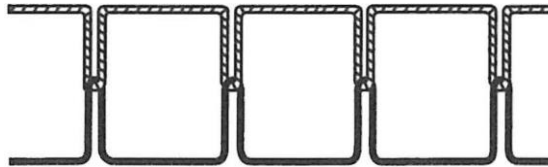

Stitch Type 301


Lockstitch as defined by ASTM D 6193-97



Seam Type LSd-2

As defined by ASTM D 6193-97


3-Dimensional pocketing shall feature these same construction details, but the reinforced single stitch Seam Type LSd-1 may be substituted for LSd-2. Detailed seam type requirements are shown below.

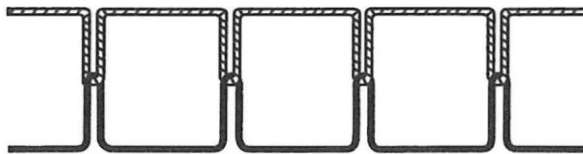

Stitch Type 301

Stitch Type 301

Lockstitch as defined by ASTM D 6193-97



Seam Typo LSd 1


Seam Type LSd-1

As defined by ASTM D 6193-97

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

134 TRIM AND DANGER LABELS

Trim and DANGER labels shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.

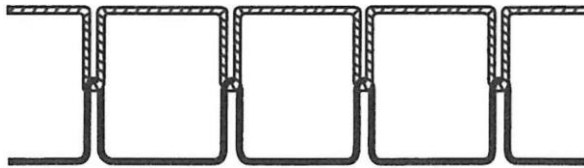

Stitch Type 301




Seam Type SSbd-1

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

135 SINGLE LAYER HEMMING AND FINISHING

Single layer hemming and finishing shall be stitched with the specified Nomex® thread. Detailed stitch and seam type requirements are shown below.



Stitch Type 301

Lockstitch as defined by ASTM D 6193-97

Seam Type EFb-1

As defined by ASTM D 6193-97

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

14.0 POCKETS

When exterior pockets are specified, the following requirements shall apply to all such custom option specified exterior pockets:

All pockets and flaps shall be reinforced at the top corners with bar tack stitching.

All pockets shall be reinforced with an extra layer of NFPA-certified outer shell, moisture barrier, or other NFPA-certified reinforcement material for extra durability. The exact location of the reinforcements shall be identified in the custom options section(s).

All pockets shall have a means to drain water and shall have a means of closure.

All pocket closures shall be made either with hook and loop fastener tape a minimum of 1.5 inches (3.8 cm) wide, with a flap, or with snaps. The specific placement of the closure system shall be outlined in the custom options sections.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

15.0 TAILORED GRADING OF GARMENT LININGS

All garment layers and Cold Weather Accessory Linings shall be graduated in size to fit within in each other in the overall composite without causing bunching or binding when the garment is worn.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

16.0 POINTS OF STRESS

All points of stress shall be reinforced with sturdy bartacks. Rivets are not acceptable because of their potential for rust and electrical or heat conduction.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

17.0 ASSET TRACKING SERVICES

Upon request, the manufacturer shall be capable of providing a web based software to track care, cleaning and maintenance of PPE. The tracking software will include Inventory Assist and the Hot Spot Locator to help you analyze gaps in your inventory and pinpoint recurring repair problems. Records will be secured in a cloud based environment with 24/7 access.

This tracking program shall meet or exceed all record-keeping requirements of NFPA 1851, *Standard on Selection, Care and Maintenance of Structural Fire Fighting Protective Ensembles*, Latest Edition. Manufacturer shall have the ability to import records for gear

purchased from them, upon request, providing all details required to meet NFPA 1851, and assist with training to assign all gear while importing.

Labels on each separable part of the garment shall include a standard style interleaved 2 of 5 barcode containing (at a minimum) an individualized serial number for asset tracking purposes.

The manufacturer shall be capable of providing training to department personnel who are involved in the daily use of this tracking program, as well as a built in interactive tutorial.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

18.0 REPAIRS AND ALTERATION SUPPORT

The manufacturer shall furnish, free of charge, reasonable quantities of NFPA 1971-certified thread, materials and other supplies to allow the department to manage its own ongoing internal maintenance efforts. Also, the manufacturer shall provide on call at no charge, during normal business hours, a liaison for the repair department to assist the Fire Department on a telephone consultation basis, on all maintenance or repair questions that might arise. Additionally, the manufacturer shall agree to expedite, on its own cost-only basis, all repairs that must be performed at the manufacturer's plant, rather than in department, over the life of the contract.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

19.1 HIGH TEMPERATURES THERMAL INSULATING MATERIALS REQUIREMENT

Because thermally stable materials are essential to maximizing protective performance in firefighters' PPE, and because NFPA only states "minimum" performance requirements, all thermal liner or thermal enhancing materials used in the garments shall also meet the following criteria after the 500 degree F oven test:

- 1) Material shall remain intact and flexible
- 2) No portion of the material shall crack, crumble or flake

Does Your Bid Comply With All Aspects of This Section? Yes ___ No ___

20.0 BREATHABILITY REQUIREMENT

Excluding where required by NFPA standard, necessary for functionality, or specifically called out in the custom option sections, all materials fabrics and reinforcements used in the construction of the garments shall be breathable and all moisture barrier material must be as specified in the Materials Section.

The breathability requirement includes but is not limited to: collar, chinstrap, storm shield, fly, water wells, front coat facings, and reinforcement cushioning where applicable.

Areas where non-breathability is allowed (absent Custom Option specifications): trim or

other items placed externally on the arms that might need extra material to pass NFPA required Stored Energy Testing, hook and loop fastening, hardware or hardware backing, and pocket linings where used exterior to the outer shell.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

21.0 CONDUCTIVE AND COMPRESSIVE HEAT RESISTANCE (CCHR)

Using breathable materials as outlined in the section titled Breathable Materials, there shall be: A minimum area of 4" x 4" (10.2 cm x 10.2 cm) at the shoulders and elbows that provide a minimum of 25 CCHR at 2 psi. With a minimum 6" x 6" (15.2 cm x 15.2 cm) area at the knees that provide 25 CCHR at 8 psi.

In all three of these compression areas at least a portion of the protective area shall be made from high temperature fiber based materials sewn to the thermal liner on the inside of the liner toward the moisture barrier.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

22.0 SEAM PROTECTION AT CUFFS

At the coat and pant cuff Major A seams, the reflective trim shall stop just before the folding of the full fold seam and for additional abrasion protection be covered by a sewn on strip of polymer coated Kevlar material laid on top of the Major A seam and covering each end of the trim.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

23.0 APPLICABLE DOCUMENTS

The following standards in their active versions on the date of invitation for bid shall form a part of this specification to the extent specified herein.

<u>STANDARD</u>	<u>TITLE</u>
ASTM D 6193-97	Standard Practice for Stitches and Seams
NFPA 1500, Latest Edition	Standard on Fire Department Occupational Safety and Health Program
NFPA 1851, Latest Edition	Standard on Selection, Care, and Maintenance of Structural Fire Fighting Protective Ensembles
NFPA 1971, Latest Edition	Standard on Protective Ensemble for Structural Firefighting

Does Your Bid Comply With All Aspects Of This Section? Yes _____ No _____

PANTS

To avoid liability and interface problems, coats and pants shall be procured from the same manufacturer.

24.0 DESIGN CONCEPT (STYLING)

The pant shall be of a traditional waist-high design to facilitate full torso ventilation of front, rear and sides of trunk for maximum body cooling effect to help minimize firefighter heat stress. For this reason, other than waist-high pants shall not be considered acceptable or "equal," since additional trunk wrapping traps heat and moisture, increasing heat stress buildup while also creating mechanical resistance when covering the natural torso flexion point of the waist.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No NO

25.0 PATTERNING CONCEPT

Garments shall feature a tailored four-piece body plus a one-piece, over-sized crotch diamond pattern in the outer shell, moisture barrier and thermal liner.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

26.1 PATTERNING REQUIREMENTS

To assure maximum freedom of movement and reduced kinetic resistance with minimum garment weight and bulk, the pants patterning shall:

- Incorporate hydraulic, swivel action leg-to-torso interfaces.
- Incorporate an oversized diamond-shaped crotch insert, graded per size, for maximum action stride, optimum stepping reach and no "in-crotch" seaming.
- In the outer seam hip area, in all three layers shall, incorporate convex seam technology to provide for generous seat expansion when squatting and crawling without creating unsightly bagginess.
- That the diamond extends from just above the left knee to just above the right knee, and be centered equally from front to rear. Width of diamond at top of crotch shall be approximately proportionally graded to waist size and inseam length.
- Ensure that pants rest in normal body line balance of 22 inches (55.9 cm) center distance at the cuff for 42 waist, 30 inseam pants.
- Provide for an alteration point at the hips so that during manufacture the hip dimension can be adjustable in two-inch (5.0cm) increments

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

27.0 SUSPENDER ATTACHMENT

8 snap style suspender loops shall be positioned on the internal waist facing. Suspender loops shall be mounted through top of waistband with triple later outer shell material,

thermal and moisture barrier.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

28.0 LINER ATTACHMENT

The moisture barrier and thermal liner assembly shall be attached to the outer shell at the waistband with seven (7) evenly-spaced glove snaps. Liners shall be attached at the cuff by means of snaps on two (2) sets Hypalon coated Kevlar tabbing per liner cuff. The male and female snap parts shall both be located on Hypalon coated Kevlar tabbing that is sewn to the liner at the cuff. A separate piece of Hypalon coated Kevlar tabbing shall be sewn to the shell cuff.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No NO

29.0 PANT CERTIFICATION LABEL ON LINER

The pant certification label on the liner shall be affixed to the inner left hip area of the liner. Does Your Bid Comply With All Aspects of This Section? Yes__ No ___

30.0 PANT CERTIFICATION LABEL ON SHELL

The pant label on the shell shall be affixed to the facing at the fly.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

31.0 FLY FRONT

The outer shell fly shall be lock stitched to the left side of the front opening and shall be in proportion to waist size and crotch rise in both length and width. Fly inner lining shall extend at least 2 inches (5.1 cm) to the left of the outer shell fly attachment seam and shall be constructed of certified breathable moisture barrier and thermal liner. The right front pant opening shall have an internal facing extending at least 2 inches (5.1 cm) to the right and constructed of specified fabric. In combination with the liner, the system shall offer 360-degree protection without gaps during movement of the outer shell moisture barrier and thermal liner. Closure shall be by means of a minimum 1.5-inch-wide (3.8-cm-wide) hook and loop fastener, and all construction techniques used shall provide liquid penetration protection under the NFPA 1971 Whole Garment Liquid Penetration Test. The fly shall be graded to the waist size of garments and crotch rise.

Does Your Bid Comply With All Aspects of This Section? Yes _____ No _____

32.1 COMPOSITE MATERIALS

The specifier has determined the ONLY acceptable combination of materials. Any substitution of materials shall be grounds for immediate disqualification of bid without further consideration.

32.2 OUTER SHELL- 7.5 OS GEMINI XT BRONZE

32.3 THERMAL LINING- 7.7 OZ CALDURA SL 21

32.4 MOISTURE BARRIER- STEDAIR 4000

Does Your Bid Comply With All Aspects of This Section?

For Outer Shell: Yes__No__

For Thermal Lining: Yes__No__

For Moisture Barrier: Yes__No__

33.0 PANT CUSTOM OPTIONS TO BE PROVIDED

Instructions in this custom options section that contradict earlier specifications or statements supersede those earlier specifications or statements if the required certifications are not compromised.

1\TFPL 41 QG Pants Bronze

PROFIT

*****PRO FIT DESIGN *****

REV!

*** Revision 1 ***

MPLPOS41 Z	MPL PRO FIT-Pants Outer Shell -7.5 oz Gemini XT - Bronze
MPLPTLQ	MPL PRO FIT Pants Thermal Liner - 7.7oz Caldura SL21
MPLPMBG	MPL PRO FIT Pants Moisture Barrier -Stedair 4000
IPLP	(021) Std -Inspection Port Liner
LNDP	Std -Liner Detachable
TR-DSSP	Std -Trim Double-Stitched
TRP307M-TL	Trim -(7) NFPA -lime 2-tone Scotchlite (3")
CLNFV2J I14-41Z	Std (J1 14) L/R Narrow Fly -2" Velcro w/ Reverse Hook on a Tab
CL-FZPF	(S16) Fly -Zipper
CFANHPF-ARB	(006) Std Half Angled Cuffs - Arashield - Black
CFPCPF-ARB	Pant Cuffs - Arashield - Black
KNBFS-41Z	(KOS) BiFlex Heat Channel Knees - Gemini XT - Bronze
KNBFHVS-ARB	(K53) Both center sections in BiFlex Knee to be Arashield - Bl
SATUP2PF-41Z	(001) Std Take Up Straps - 2 Postman - Gemini XT - Bronze
PKBLXPF-41Z	X-Large Bellows Pockets -PBI Gemini XT Bronze -- 10 x 10 x 2
PKTDTVPF-KV	Tool Divider - Kevlar - 6" High - Place inside right bellows pocket at bottom - On pant portion - Divide into 3 equal compartments
PKTDIVPF-KV	Tool Divider - Kevlar - 4" High - Place inside right bellows pocket - On the other tool divider at the bottom of the divider - Divide into 3 equal compartments

Does Your Bid Comply With All Aspects of This Section? Yes__No_

**PERCENTAGE SPECIFICATION COMPLIANCE
CALCULATIONS**

	Total Number "Yes/No" Questions		
	Total Number of Yes Answers		
	Total Number of No Answers		
% Specification Compliance: $[(\text{Total Yes Answers}) \div (\text{Total Answers})] \times 100\%$			%

Each "No" answer requires a full written explanation.

Each "Yes/No" question not checked where provided will be considered a "No" answer.

CITY OF FORT MITCHELL BID PRICING SHEET
FORT TWENTY-FIVE SETS OF PERSONAL
PROTECTIVE COATS AND PANTS

\$ _____

Addendum # received _____

Non-Collusive Bid Statement: The undersigned bidder, having fully informed himself regarding the accuracy of the statements made herein, certifies that: (1) The bid has been arrived at by the bidder independently and has been submitted without collusion with, and without any agreement, understanding, or planned common course of action with any other vendor of materials, supplies, equipment, or services described in the bid, designed to limit independent bidding or competition, and (2) The contents of the bid have not been communicated by the bidder or its employees or agents to any person not an employee or agent of the bidder or its surety on any bond furnished with the bid, and will not be communicated by any such person prior to the official opening of the bid.

Signature of Authorized
Official

Name and Title (printed)

Legal Name of Business

Address

Address

Telephone Number

Date

Affix seal below if bid is by corporation.

This seal was herewith affixed in the presence of:

Signature _____ Title _____

REQUIRED AFFIDAVIT FOR BIDDERS CLAIMING KENTUCKY RESIDENT BIDDER
STATUS

The bidder or offeror hereby swears and affirms under penalty of perjury that, in accordance with KRS 45A.494(2), the entity bidding is an individual, partnership, association, corporation, or other business entity that, on the date the contract is first advertised or announced as available for bidding:

1. Is authorized to transact business in the Commonwealth;
2. Has for one year prior to and through the date of advertisement
 - a. Filed Kentucky corporate income taxes;
 - b. Made payments to the Kentucky unemployment insurance fund established in KRS 341.49; and
 - c. Maintained a Kentucky Workers' Compensation policy in effect.

The City of Fort Mitchell reserves the right to request documentation supporting a bidder's claim of resident bidder status. Failure to provide such documentation upon request shall result in disqualification of the bidder or contract termination.

_____	_____
Signature	Printed Name
_____	_____
Title	Date
Company Name _____	
Address _____	

Subscribed and sworn to before me by _____ (Affiant) _____ (Title)

of _____ This ____ day of _____, 20 ____.

(Company Name)

Notary Public
[seal of notary] My commission expires: _____